


VAIO 6
VAIO 6 STAR

- One-seater bath with side overflow, generous width and integrated arm rests
- Diverse installation possibilities, also corner installation
- Also available with grips
- Made of KALDEWEI steel enamel



Similar illustration

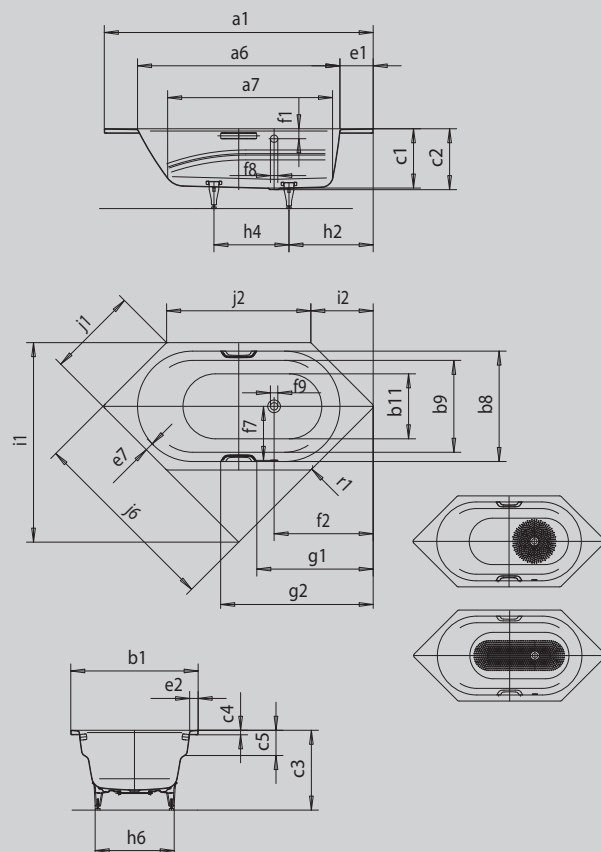

GRIP DISCREET OPULENCE



INVISIBLE
GRIP

**SOUND
WAVE**

Model		959
External length [mm]	a ₁	1900 mm
Internal length (top) [mm]	a ₆	1430 mm
Internal length (bottom) [mm]	a ₇	1165 mm
External width [mm]	b ₁	900 mm
Internal width (top) [mm]	b ₆	780 mm
Internal width (top) bathing area without armrest	b ₉	650 mm
Internal width (bottom) [mm]	b ₁₁	600 mm
Depth inside [mm]	c ₁	420 mm
Depth incl. waste hole [mm]	c ₂	430 mm
Height with feet [mm]	c ₃	555 - 585 mm
Height of rim [mm]	c ₄	32 mm
Armrest depth [mm]	c ₅	178 mm
Width of rim side	e ₇	58 mm
Width of rim (foot end; long side) [mm]	e ₁ ; e ₂	235; 60 mm
Distance top edge to centre of overflow hole [mm]	f ₁	70 mm
Distance bath edge to centre of waste hole [mm]	f ₂	700 mm
Distance centre of waste hole to centre of overflow hole [mm]	f ₇	380 mm
Diameter of overflow hole [mm]	f ₈	Ø 52 mm
Diameter of waste hole [mm]	f ₉	Ø 52 mm
Distance bath edge (foot end) to start of grip [mm]	g ₁	770 mm
Distance bath edge (foot end) to end of grip [mm]	g ₂	1078 mm
Distance foot end of bath edge to centre of foot [mm]	h ₂	595 mm
Distance between the feet [mm]	h ₄	530 mm
Width of feet max. [mm]	h ₆	575 mm
Installation dimension [mm]	i ₁	1409 mm
Angled edge [mm]	i ₂	440 mm
Side length [mm]	j ₆	1357 mm
Length of sides	j ₁ ; j ₂	636; 1019 mm
External radius [mm]	r ₁	23 mm
Water volume [l]		145 l
Net weight [kg]		47 kg
Diameter of anti-slip [mm]		Ø 435 mm
Full anti-slip		900 x 300 mm

Subject to technical alterations, tolerances and errors. Similar illustration. 70 litres displacement on average.

KALDEWEI