


FLOWPOINT ZERO


- Timeless design made of high-quality stainless steel
- Quick and easy cleaning with the KALDEWEICLICK'n CLEAN ® opening mechanism
- Can be flexibly positioned directly in front of the wall or in the centre of the shower area
- Wall-side installation from ≥ 14.5 mm ± 3 mm.Floor-side installation from 11 mm to 28 mm
- Perfectly matched to the requiredFLOWDRAIN HORIZONTAL drain fittings
- Design by STUDIO AISSLINGER




Similar illustration

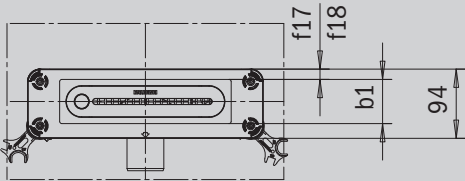

Mod.4203

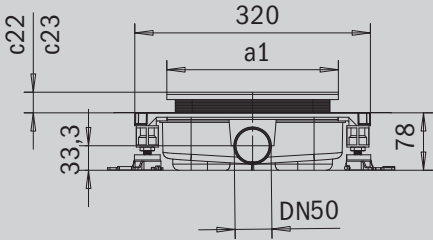

Mod.4204

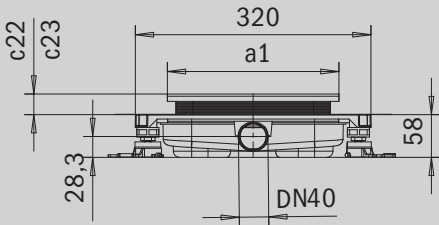

Model		2410
External length [mm]	a ₁	233 mm
External width [mm]	b ₁	60 mm
Tile installation height min.	c ₂₂	11 mm
Tile installation height max.	c ₂₃	28 mm
Distance to the wall min.	f ₁₇	11,5 mm
Distance to the wall max.	f ₁₈	18 mm
Gross length		275 mm
Gross width		155 mm
Gross height		35 mm
Net weight [kg]		0 kg
Gross weight		0 kg
VPE 1 Gewicht		0,3 kg
VPE 1 Mass A		1200 mm
VPE 1 Mass B		800 mm
VPE 1 Mass C		1429 mm
PU 1 quantity		80 pieces
PU 1 packaging type		PN